

RWM 150 Baling Press

Technical Specification

Take control and convert your dry recyclable packaging waste into manageable bales.

Recyclers and industrial users of a vertical baler can benefit from waste volume reduction; storage, handling and transportation savings; avoidance of ever-increasing landfill charges; the satisfaction of environmental benefits and even the generation of an additional revenue yield.

- **12 month** warranty
- Suitable for volume reduction of **cardboard and plastic**
- **950mm** wide feed aperture
- Can be sited outside
- Available in **16amp single phase, 3 phase or 110V**
- **8 tonne** press force
- 3 Polyseter bale tying for a **secure bale**
- Automatic bale ejection
- **CE approved**
- Fitted retaining claws to prevent material springing back
- Bale weights of **up to 150kg**






Contact Us

0115 896 5460

RWM 150 Baling Press

Technical Specification

Press Force	8 Tonnes
Loading Aperture (H x W x D)	470 x 975 x 800mm
Bale Weight	up to 150Kg
Bale Dimensions (H x W x D)	1000 x 975 x 800mm
Cycle Time	40 seconds
Noise	72 decibels
Machine Weight	7801 Kg
Power Supply (kW-V-Hz)	16amp 2.2kW-230V-50Hz
Overall Dimensions (H x W x D)	2600 x 1560 x 1200mm
Operational Transportation Height	1955mm

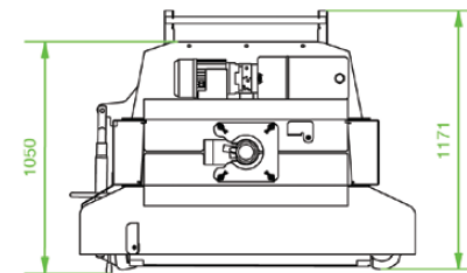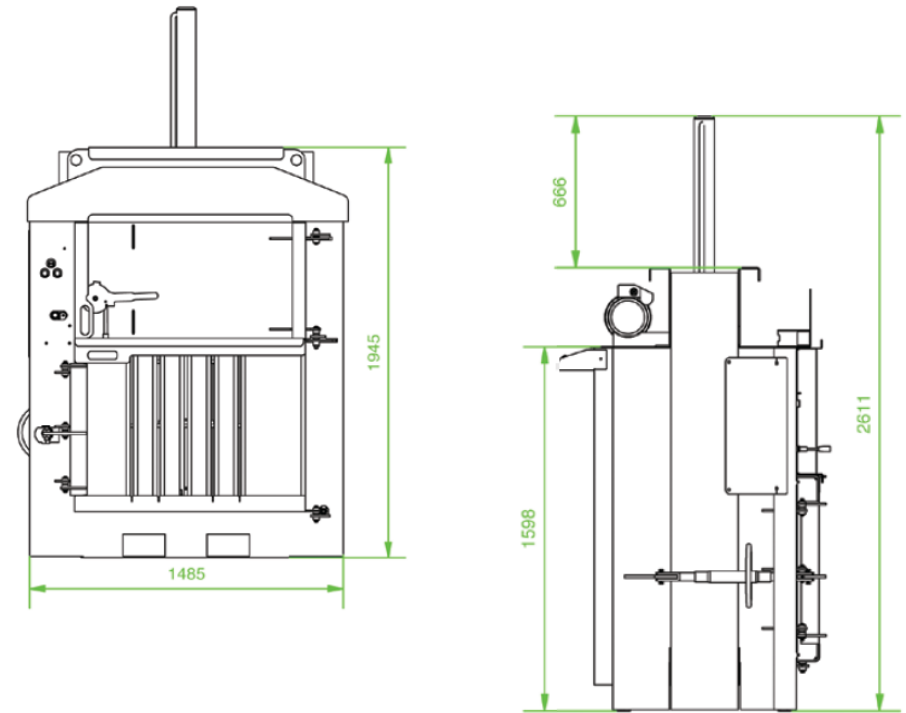

Operating Voltage – 220 - 240v.

Frequency – 50hz.

Connector plug fitted – 16amp
single phase, three
pin plug.

**MCB (Minature circuit
breaker) if fitted** – Cat C or above