

RWM 500 Baling Press

Technical Specification

Take control and convert your dry recyclable packaging waste into manageable bales.

Recyclers and industrial users of a vertical baler can benefit from waste volume reduction; storage, handling and transportation savings; avoidance of ever-increasing landfill charges; the satisfaction of environmental benefits and even the generation of an additional revenue yield.

- **12 month** warranty
- **1500mm** wide feed aperture
- **50 Tonne press force**
- Can be sited outside
- **Available in 32 amp 3-phase or 16amp single phase electrics**
- Bale weights of **up to 550kg**
- **5 wire tying for a secure bale**
- Automatic bale ejection
- **CE approved**
- Fitted retaining claws to prevent material springing back
- Powder coated finish for durability







Contact Us

0115 896 5460

RWM 500 Baling Press

Technical Specification

Press Force	50 Tonnes
Loading Aperture (H x W x D)	880 x 1500 x 769mm
Bale Weight	up to 550Kg
Bale Dimensions (H x W x D)	1200 x 1500 x 769mm
Cycle Time	40 seconds
Noise	74 decibels
Machine Weight	1650 Kg
Power Supply (kW-V-Hz)	32amp 11kW-400V-50Hz
Overall Dimensions (H x W x D)	3209 x 2115 x 1200mm
Operational Transportation Height	2500 mm

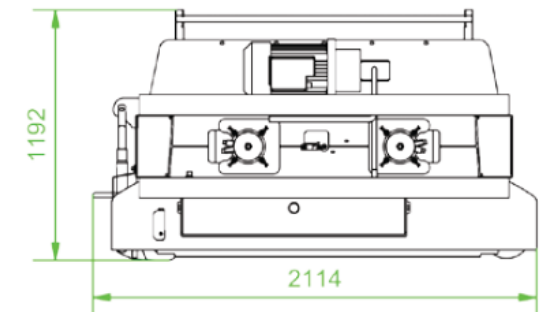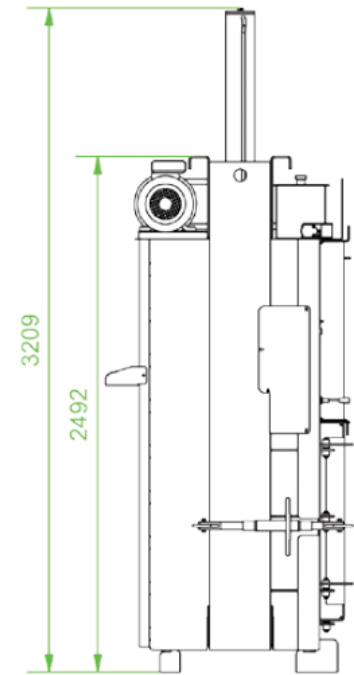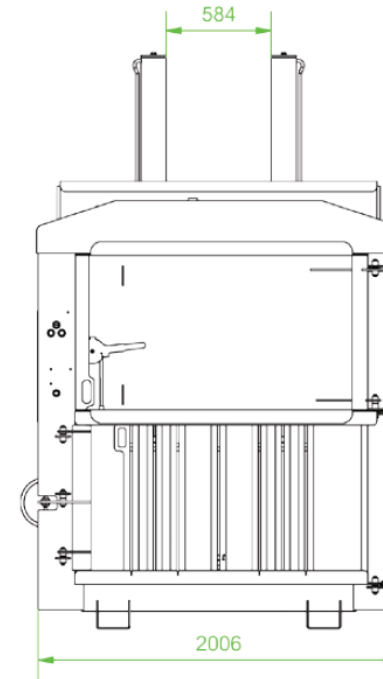

Operating Voltage – 400v.
Frequency – 50hz.
Connector plug fitted – 32amp
three phase five pin. A+N+PE
**MCB (Minature circuit
breaker) if fitted** – Cat C or above