

RWM 600 Baling Press

Technical Specification

Take control and convert your dry recyclable packaging waste into manageable bales.

Recyclers and industrial users of a vertical baler can benefit from waste volume reduction; storage, handling and transportation savings; avoidance of ever-increasing landfill charges; the satisfaction of environmental benefits and even the generation of an additional revenue yield.

- **12 month** warranty
- **1500mm** wide feed aperture
- **50 Tonne press force**
- Can be sited outside
- **Available in 16 amp 3-phase or 16amp single phase electrics**
- Bale weights of **up to 650kg**
- **5 wire tying for a secure bale**
- Automatic bale ejection
- **CE approved**
- Fitted retaining claws to prevent material springing back
- Powder coated finish for durability







Contact Us

0115 896 5460

RWM 600 Baling Press

Technical Specification

Press Force	50 Tonnes
Loading Aperture (H x W x D)	883 x 1500 x 1100mm
Bale Weight	up to 650Kg
Bale Dimensions (H x W x D)	1100 x 1500 x 1100mm
Cycle Time	40 seconds
Noise	68 decibels
Machine Weight	1930 Kg
Power Supply (kW-V-Hz)	16amp 5.5kW-400V-50Hz
Overall Dimensions (H x W x D)	3217 x 2103 x 1524mm
Operational Transportation Height	2500 mm

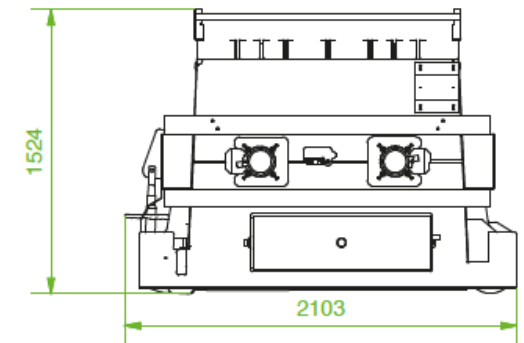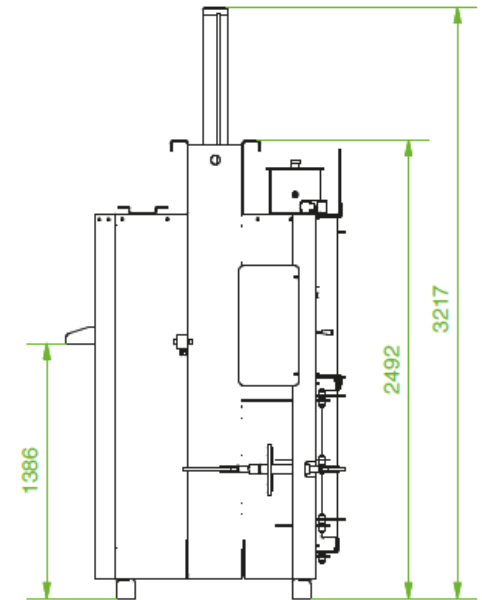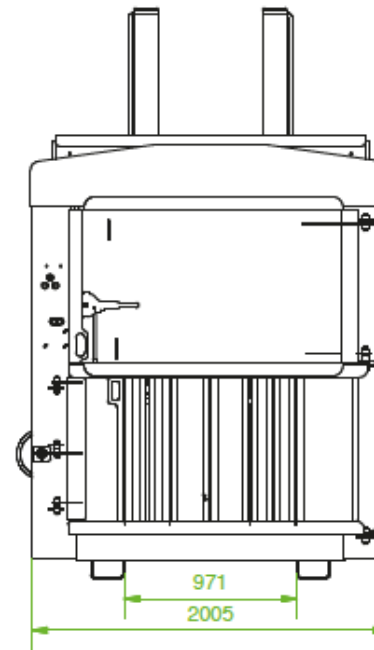

Operating Voltage – 400v.
Frequency – 50hz.
Connector plug fitted – 32amp
three phase five pin. A+N+PE
**MCB (Minature circuit
breaker) if fitted** – Cat D